


## J.F.K

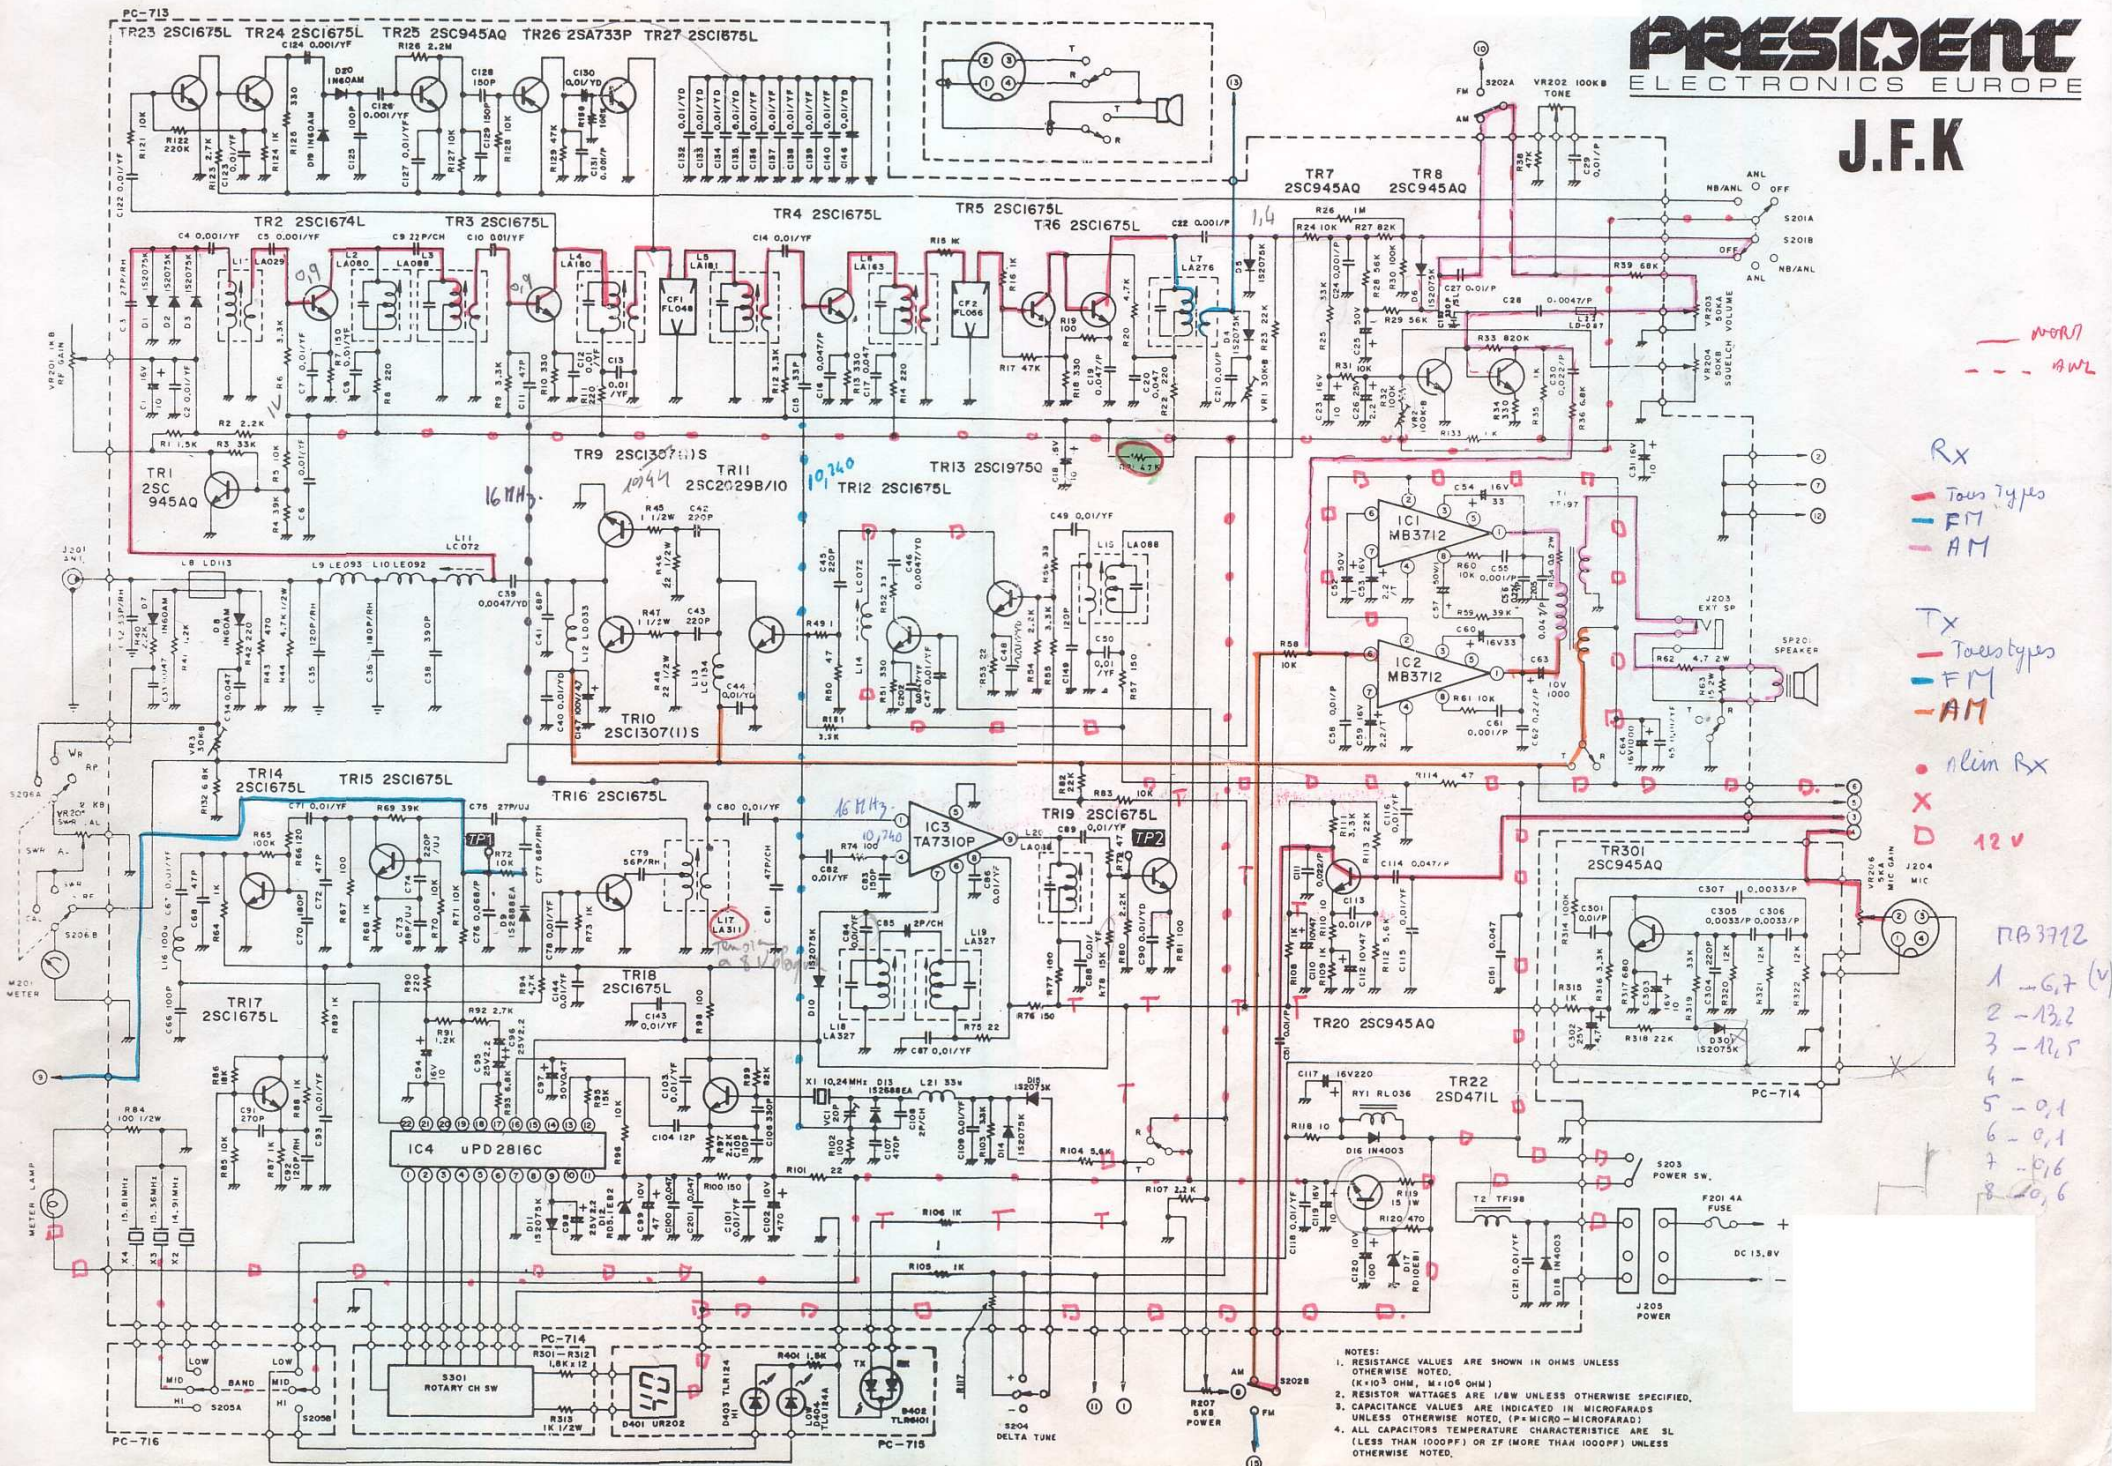

--- WORK  
 - - - - - AWL  
 Rx  
 - Trans Types  
 - FM  
 - AM  
 Tx  
 - Trans types  
 - FM  
 - AM  
 • 12V  
 X  
 D  
 PB3712  
 1 - G,7 (V)  
 2 - 13,2  
 3 - 12,5  
 4 -  
 5 - 0,1  
 6 - 0,1  
 7 - 0,16  
 8 - 0,6

NOTES:  
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.  
 (K=10<sup>3</sup> OHM, M=10<sup>6</sup> OHM)  
 2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE SPECIFIED.  
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED, (P=MICRO-MICROFARAD).  
 4. ALL CAPACITORS TEMPERATURE CHARACTERISTIC ARE 5L (LESS THAN 1000PF) OR ZF (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.