


PRESIDENT  
WILSON

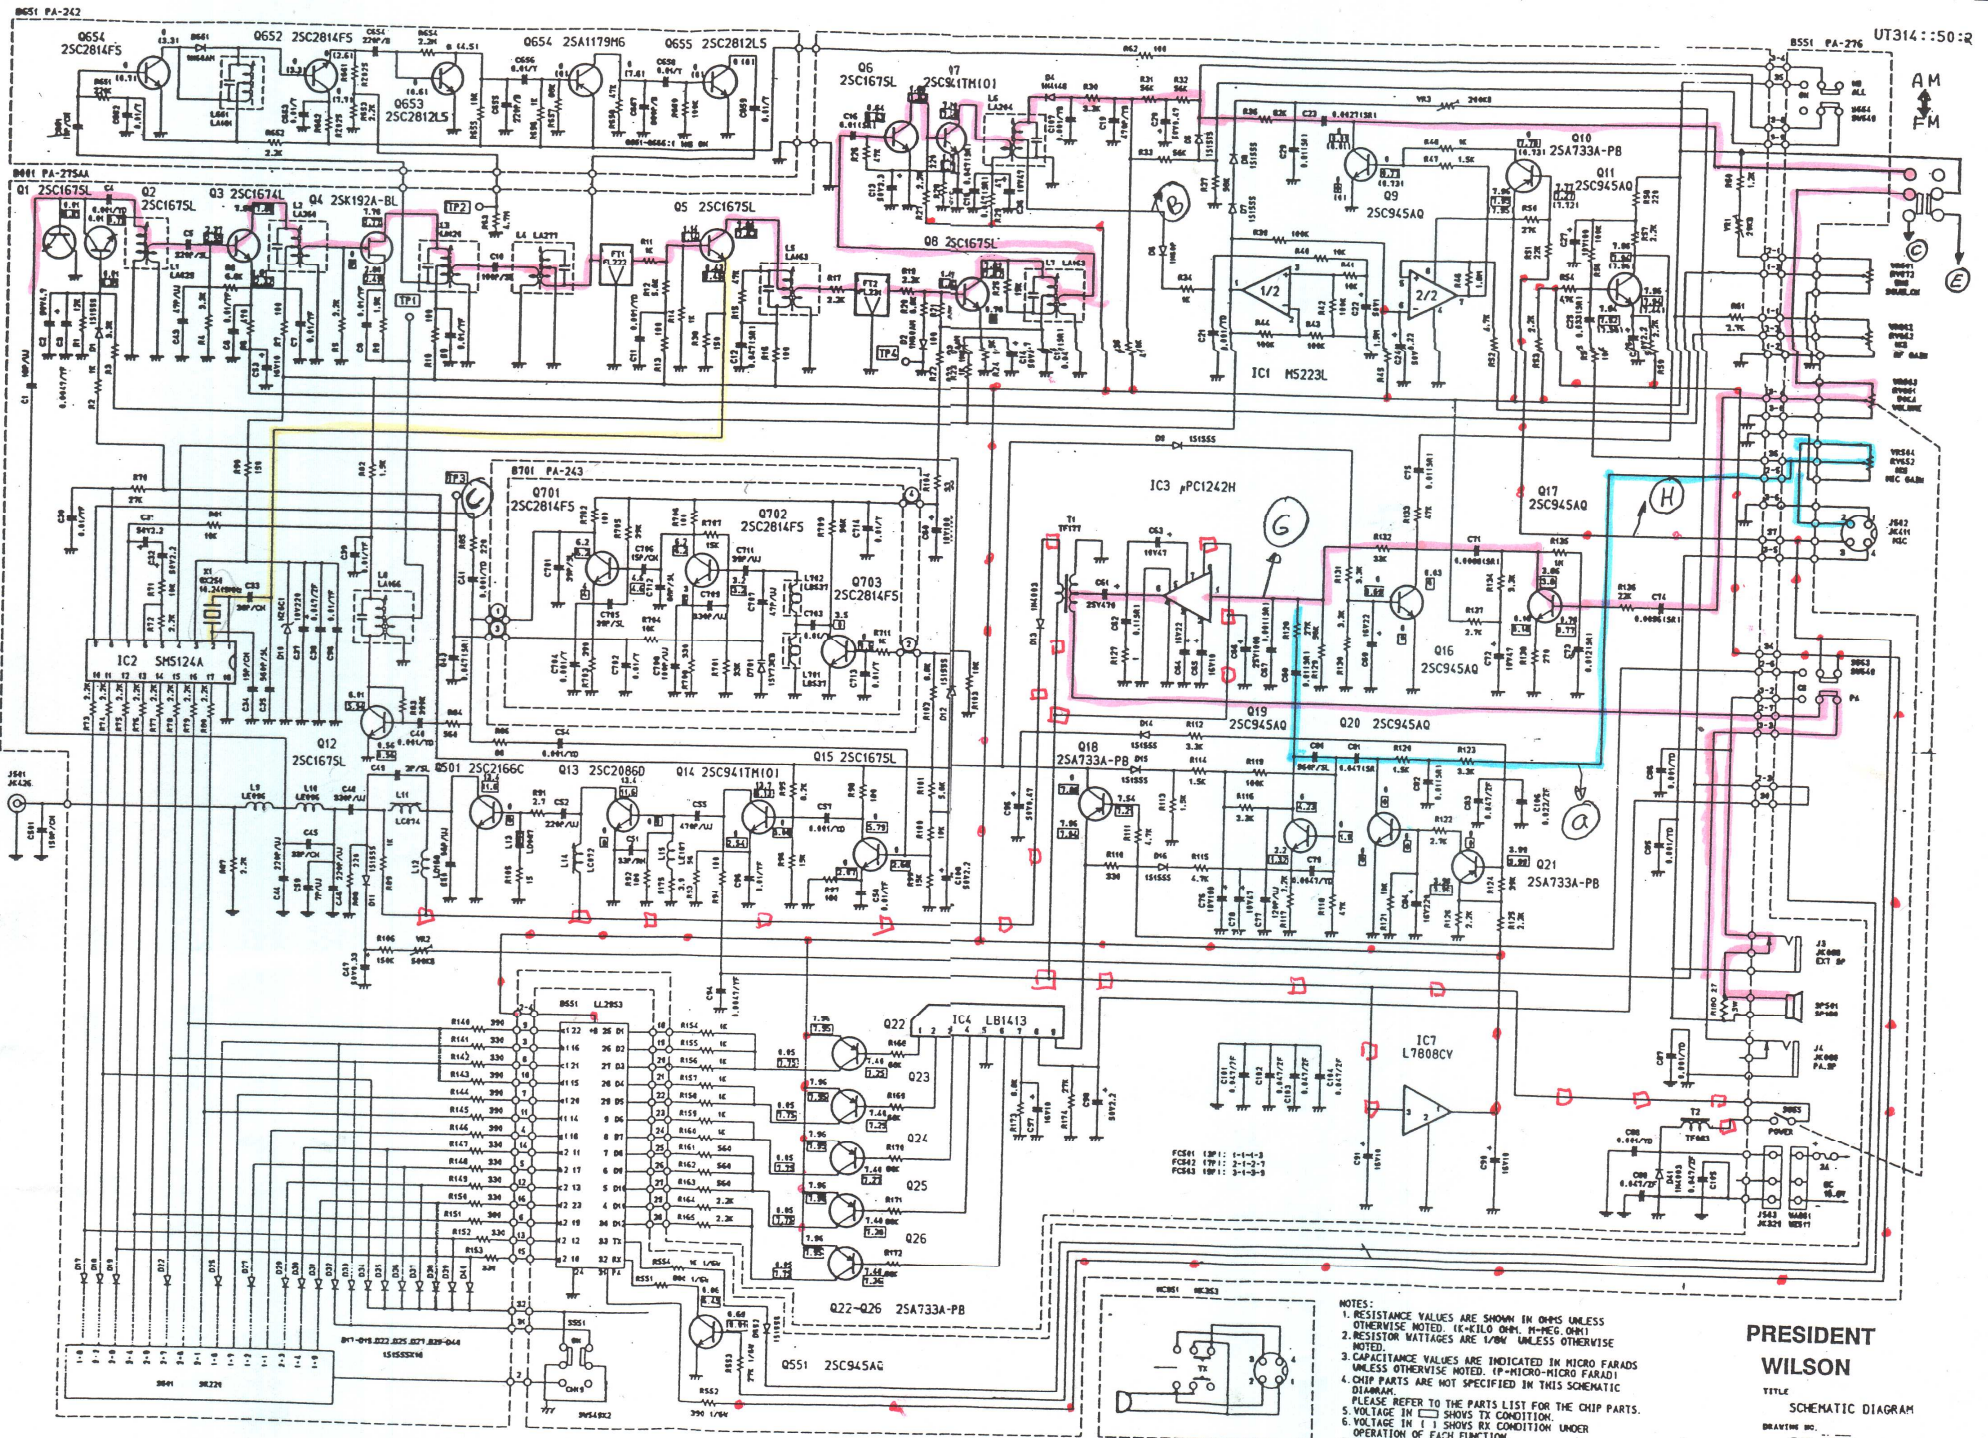

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-MICRO FARAD)
  4. CHIP PARTS ARE NOT SPECIFIED IN THIS SCHEMATIC DIAGRAM.
  5. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.
  6. VOLTAGE IN ( ) SHOWS TX CONDITION.
  7. VOLTAGE IN [ ] SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
  8. VOLTAGE IN NO MARK SHOWS RX CONDITION.

**PRESIDENT**  
**WILSON**  
TITLE  
SCHEMATIC DIAGRAM  
DRAWING NO.  
E12-2700  
UNIDEN CORP