





PC 33 SCHEMATIC

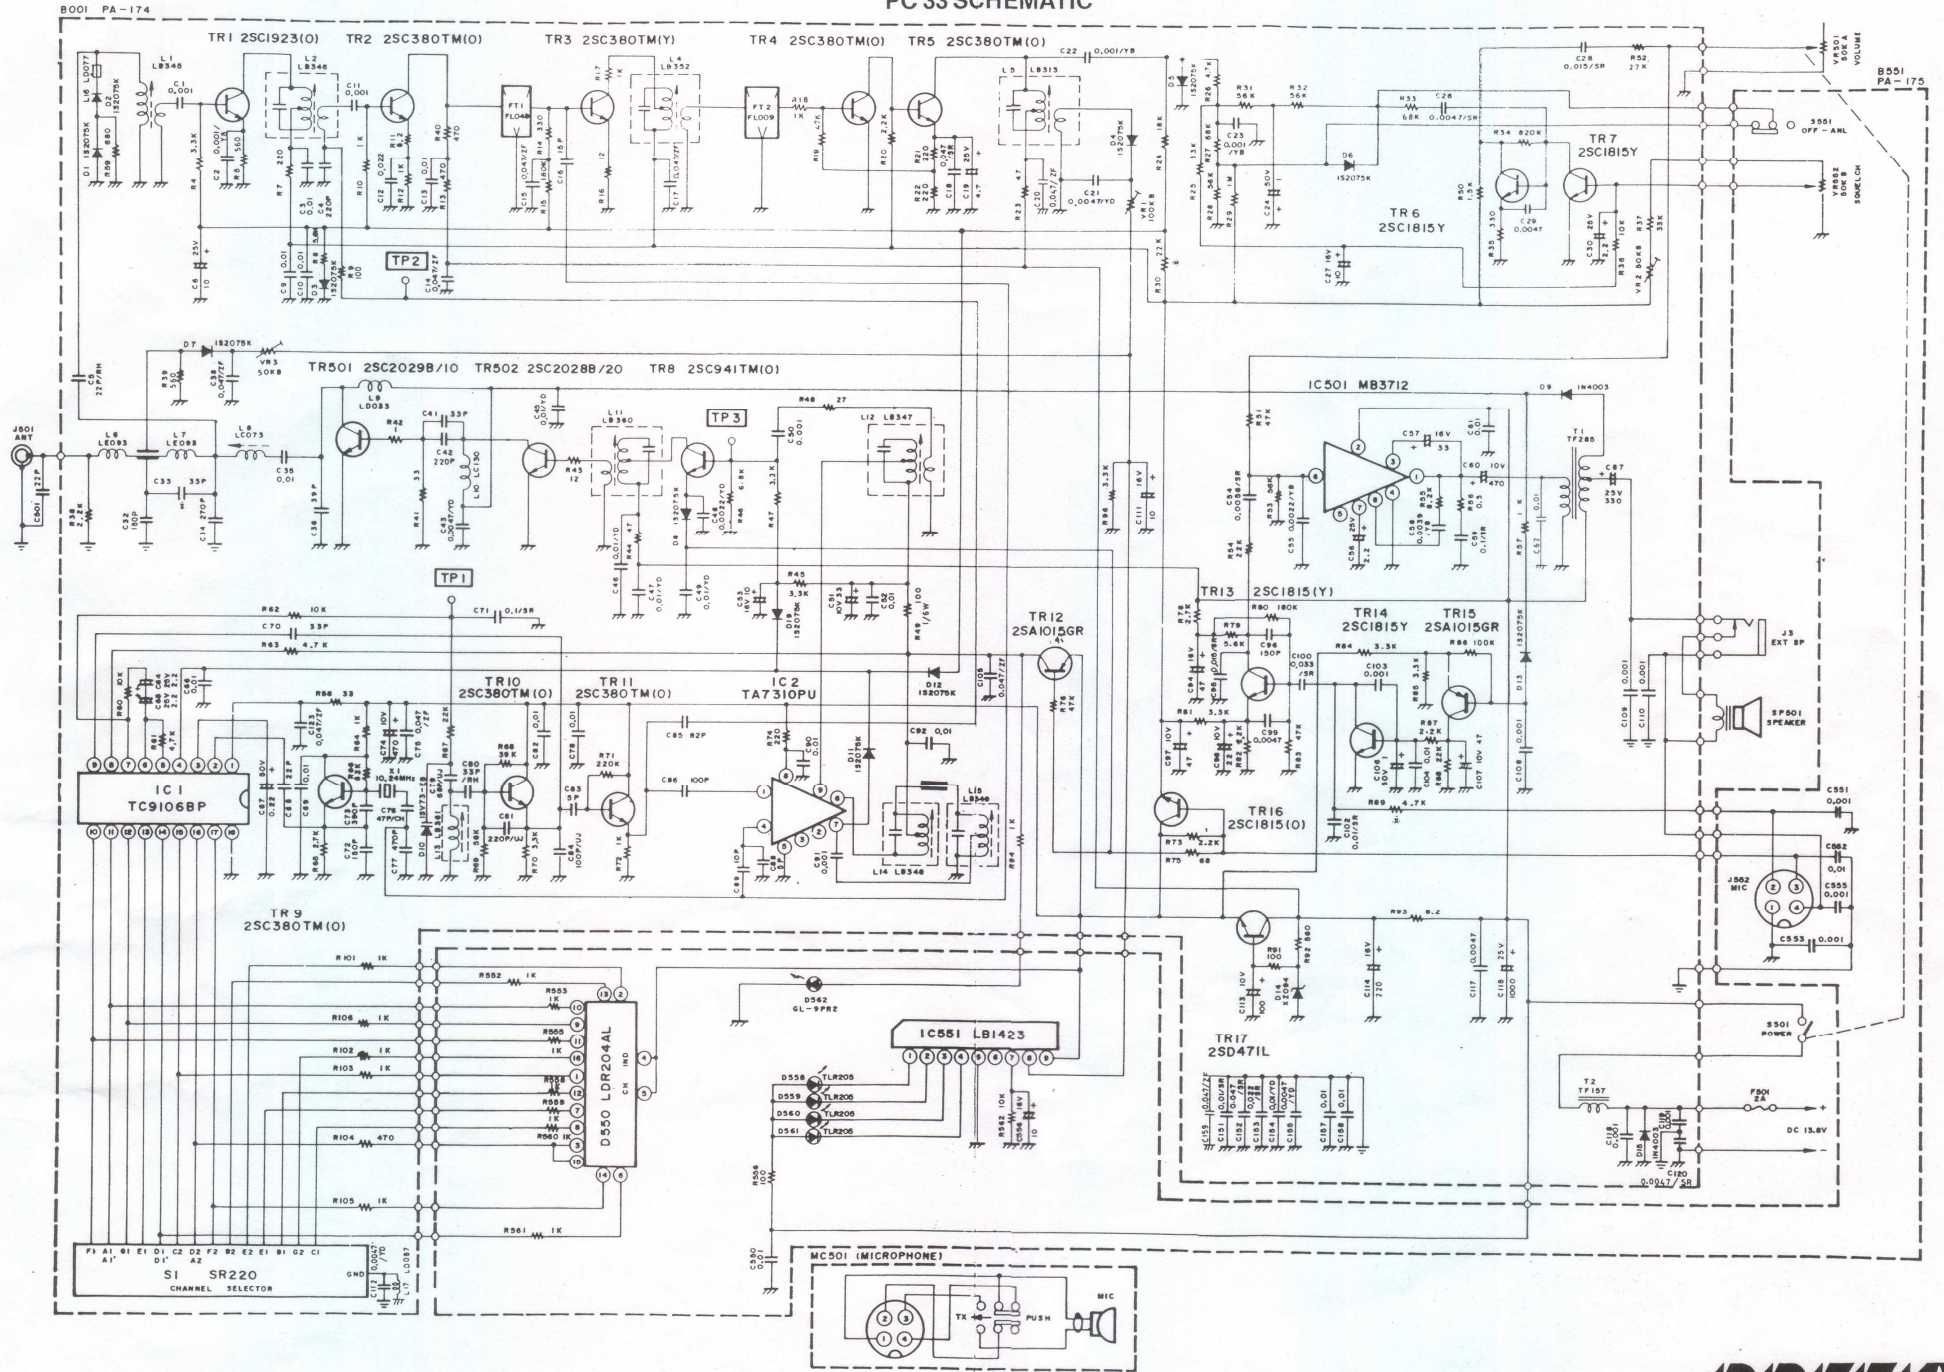

8001 PA-252

8551 PA-252

UT318:50:2

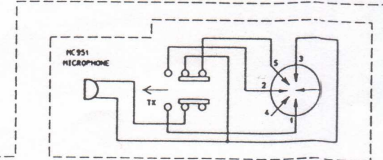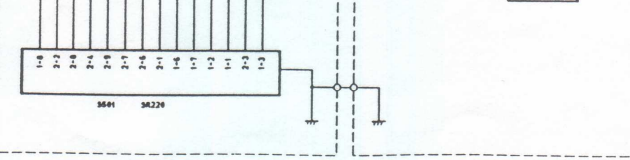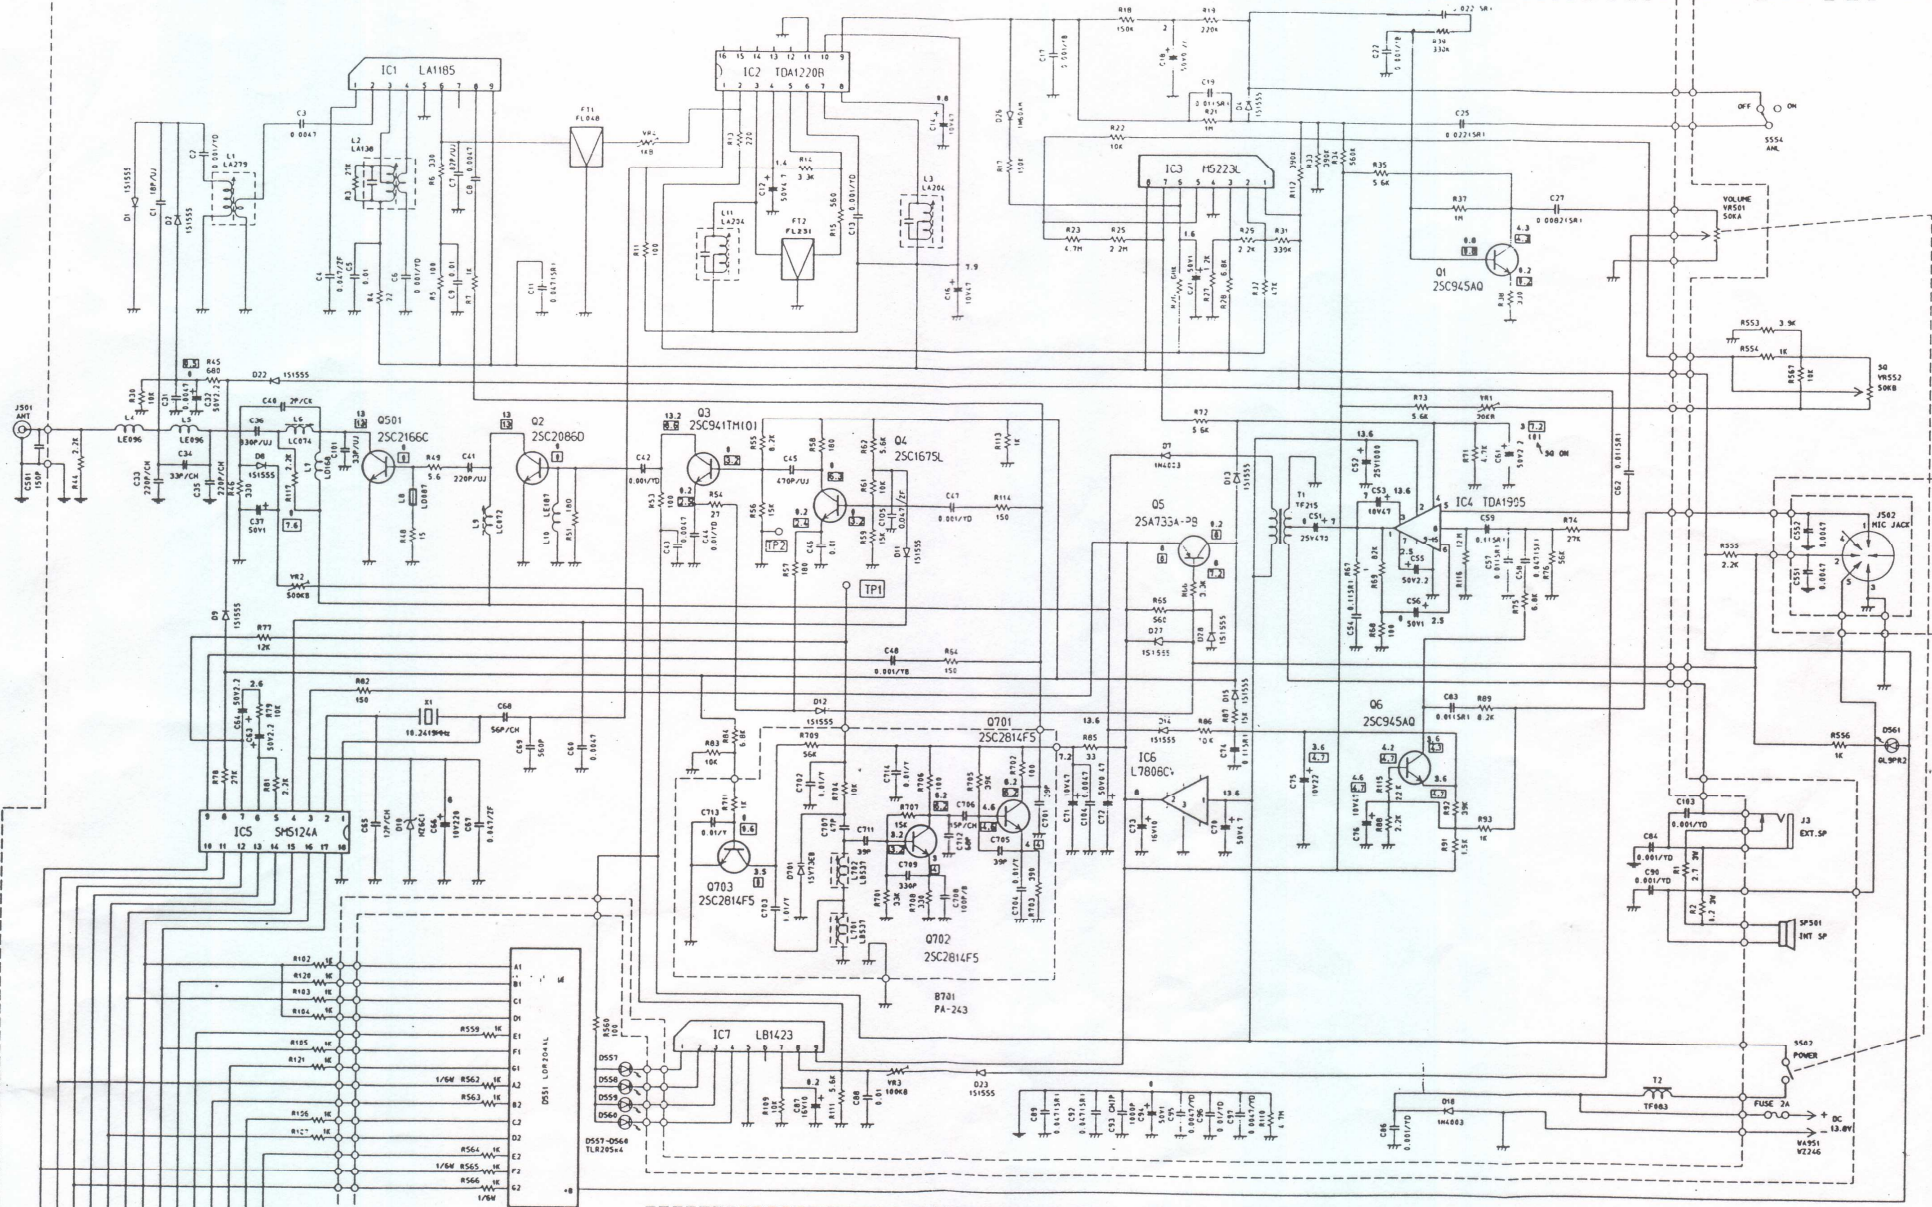

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
  2. RESISTOR WATTAGES ARE 1/8W UNLESS OTHERWISE NOTED.
  3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=PICO-FARAD)
  4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE 5% (LESS THAN 100PF) OR 1% (MORE THAN 100PF) UNLESS OTHERWISE NOTED.
  5. VOLTAGE IN [ ] SHOWS TX CONDITION.
  6. VOLTAGE IN ( ) SHOWS RX CONDITION UNDER OPERATION OF EACH FUNCTION.
  7. VOLTAGE IN # MARK SHOWS RX CONDITION.

DESIGN BY	DRAWN BY	UNIDEN NO.	MODEL NO.
6/12/6	6/12/4	UT-318/B	PC33X/AX
AWK/MWR	MINE	TITLE	
CHK. BY	APPRO. BY	SCHEMATIC DIAGRAM 1/2	
		DRAWING NO.	
		E12-2582 1/2	
		DATE	